



24V
12A

PFC0360-24CH12X

Intelligent design for charging AGM, GEL, Flooded lead acid batteries and various Lithium batteries, and widely used for electric wheelchairs, mobilities, scooters, e-bikes, medical equipments, etc.. PF2412X charger meets the ISO 7176-21:2009 standard. AC/DC cable is completely customizable.

Main applications:
High Reliability
Can be used globally
Premium charging Quality
Global + Efficient

PFC0360-24CH12X Charger Specifications

Table with 2 columns: Specification, Value. Rows include DC Output (24 VDC), AC Input, and Regulatory details.

Table with 2 columns: Specification, Value. Rows include AC Input details like Nominal AC input voltage, frequency, and current.




Table with 2 columns: Specification, Value. Rows include Regulatory details like Efficiency, Safety (LVD), Emissions (EMC), and Immunity (EMC).

Table with 2 columns: Specification, Value. Rows include Mechanical details like Dimensions, Weight, AC input connector, DC output connector, inhibit function, and Cooling.

Table with 2 columns: Specification, Value. Rows include Environmental details like Enclosure, Operating temperature, and Storage temperature.



- Highlighted Features:
- User friendly LED indicators for AC source, battery status, charging, error.
- Auto-recharge for low voltage in maintenance mode
- OEM customizable & field replaceable AC/DC cabling
- With ISO 7176-21:2009 certificate

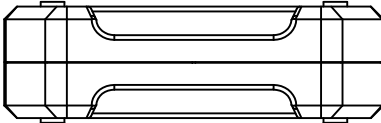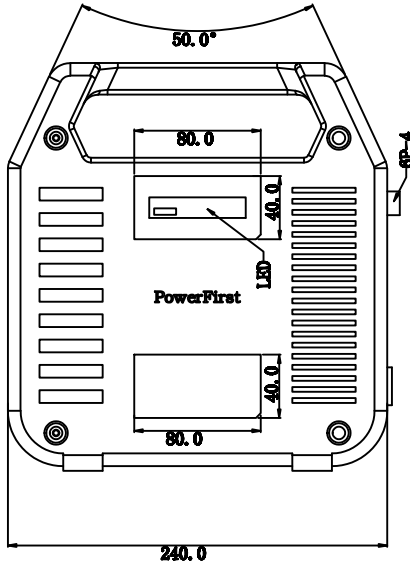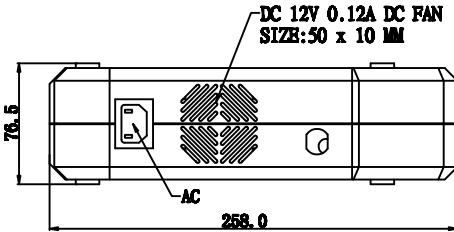

Visit epowerfirst.com/product/reha-mobility-360w/ to view the complete product datasheet.
Copyright © 2022 PowerFirst Company Limited. All rights reserved.