

Dr. Star Huang
Founder & Director



PowerFirst Website
www.epowerfirst.com



Jason Long
Founder Chief Assistant



Collin Lai
Manager of Marketing Dept.



Ken Ge
Sales representative



深圳市顶尖电源科技有限公司
PowerFirst Technology Company Limited

集团主营业务：光伏逆变器，充电桩模块，OBC，储能电源，充电器等新能源领域中高档电源产品的研发和精益制造，及相关产业链海外中小企业投资/并购
PowerFirst Product: Design & Manufacture of PV inverter, charging pile module, OBC, UPS, Energy Storage Power Supply, battery charger, and the related segment overseas SMEs invest & merge





PowerFirst 全功率段智能充电器产品选型手册 全功率段充电器系列

PowerFirst Charger Portfolio Full Power Range Solutions Guide

>>> 适用于新产品设计 · 品类选型 · 供应商甄选
For New Product Development · Category Sourcing · Supplier Evaluation

赋能中国客户走向世界，让世界客户爱上中国
Empowering China customers' globalization, inspiring global customers to love China

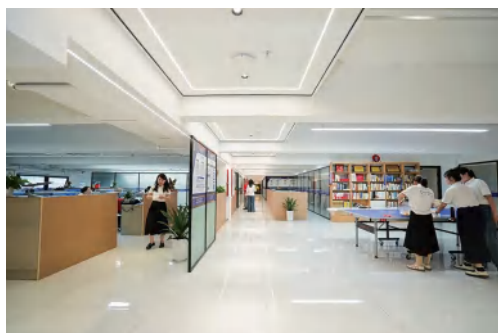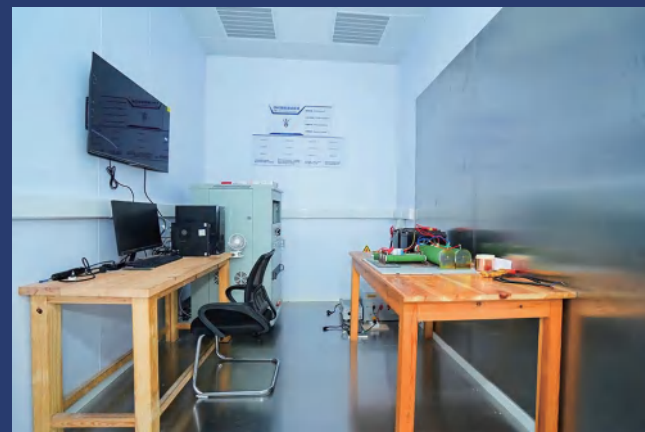

ABOUT US

PowerFirst Technology Company Limited was founded in 2003 and headquartered in Pinghu, Longgang, Shenzhen. It is a national high-tech enterprise focusing on manufacturing high-end industrial chargers and investing in related upstream industries.

PowerFirst company has 17 families of chargers that have been widely used in Construction Machinery vehicles, Aerial Work Platforms, Cleaning Machines, Scrubbers and Sweepers, Electric Forklifts, AGV / AMR / UAV, Electric Wheelchairs and Scooters, Golf carts, Electric Agricultural Machinery, Electric Lawn Mowers, Electric Watersports equipment (water skis, electric yachts), Electric Motorcycles, Electric Bicycles, GSE equipment and other battery powered equipment and low-speed vehicles.

PowerFirst Product

Design & Manufacture of PV inverter, charging pile module, OBC, UPS, Energy storage Power Supply, battery charger, and the related segment overseas SMEs invest & merge.

Product List



60W CHARGERS	01	1000W CHARGERS	22
90W CHARGERS	02	1200W CHARGERS	23 – 25
120W CHARGERS	03	1800W CHARGERS	26
150W CHARGERS	04 – 05	2000W CHARGERS	27
180W CHARGERS	06	2400W CHARGERS	28 – 29
240W CHARGERS	07 – 08	3KW CHARGERS	30 – 31
300W CHARGERS	09 – 10	3.6KW CHARGERS	32 – 33
360W CHARGERS	11	6KW CHARGERS	34
450W CHARGERS	12 – 14	7.2KW CHARGERS	35
600W CHARGERS	15 – 16	8KW CHARGERS	36
720W CHARGERS	17 – 18	10KW CHARGERS	37 – 38
750W CHARGERS	19	12KW CHARGERS	39
800W CHARGERS	20	16KW CHARGERS	40
900W CHARGERS	21	20KW CHARGERS	41

>> 60W CHARGERS

HQ 60W



PF2402SL



Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	HQ 60W	24	2	Yes			Yes				Yes	158 x 72.4 x 45.5
												Dimensions (inches)
												6.22 x 2.85 x 1.79
	PF2402SL	24	2	Yes			Yes				Yes	Dimensions (mm)
												135.5 x 65.7 x 38
												Dimensions (inches)
												5.33 x 2.59 x 1.50

>> 90W CHARGERS

PF2403SL



PF2403AL



Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	PF2403SL	24	3		Yes	Yes					Yes	160 x 86 x 52.5
												Dimensions (inches)
												6.30 x 3.39 x 2.07
	PF2403AL	24	3		Yes	Yes					Yes	Dimensions (mm)
												190.2 x 89.4 x 55.8
												Dimensions (inches)
												7.49 x 3.52 x 2.20

>> 120W CHARGERS

HQ 120W



PF2404SL



Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	HQ 120W	24	4	Yes							Yes	185.6 x 72.3 x 50.4
												Dimensions (inches)
												7.31 x 2.85 x 1.98
	PF2404SL	24	4		Yes	Yes					Yes	Dimensions (mm)
												160 x 86 x 52.5
												Dimensions (inches)
												6.30 x 3.39 x 2.07

>> 150W CHARGERS

HQ 150W



Smart 150W



PF2405SL



PF2405LP



PF2405AL



Korea 150W



>> 150W CHARGERS

Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	HQ 150W	24	5	Yes			Yes				Yes	203.7 x 83.8 x 54.4
												Dimensions (inches)
												8.02 x 3.30 x 2.14
	Smart 150W	24	5		Yes	Yes				Yes		Dimensions (mm)
												135 x 126.2 x 60
												Dimensions (inches)
												5.31 x 4.97 x 2.36
	PF2405SL	24	5		Yes	Yes					Yes	Dimensions (mm)
												160 x 86 x 52.5
												Dimensions (inches)
												6.30 x 3.39 x 2.07
	PF2405LP	24	5		Yes	Yes					Yes	Dimensions (mm)
												168 x 95.2 x 55
												Dimensions (inches)
												6.61 x 3.75 x 2.17
	PF2405AL	24	5		Yes	Yes					Yes	Dimensions (mm)
												190.2 x 89.4 x 55.8
												Dimensions (inches)
												7.49 x 3.52 x 2.20
	Korea 150W	24	5		Yes	Yes					Yes	Dimensions (mm)
												168 x 95.2 x 55
												Dimensions (inches)
												6.61 x 3.75 x 2.17

>> 180W CHARGERS

PF2406LP



Korea 180W



Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	PF2406LP	24	6		Yes	Yes					Yes	168 x 95.2 x 55
												Dimensions (inches)
												6.61 x 3.75 x 2.17
	Korea 180W	24	6		Yes	Yes					Yes	Dimensions (mm)
												168 x 95.2 x 55
												Dimensions (inches)
												6.61 x 3.75 x 2.17

>> 240W CHARGERS

HQ 240W



PF2408LP



PF2408



PF2408X



Korea 240W



>> 240W CHARGERS

Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	HQ 240W	24	8	Yes			Yes				Yes	231.5 x 95.7 x 61
												Dimensions (inches)
												9.11 x 3.77 x 2.40
	PF2408LP	24	8		Yes	Yes				Optional	Yes	Dimensions (mm)
												168 x 95.2 x 55
												Dimensions (inches)
	PF2408	24	8	Yes			Yes				Yes	237.4 x 148 x 69.2
												Dimensions (inches)
												9.35 x 5.83 x 2.72
	PF2408X	24	8		Yes		Yes				Yes	Dimensions (mm)
												199.4 x 140.3 x 189.2
												Dimensions (inches)
	Korea 240W	24	8		Yes	Yes					Yes	7.85 x 5.52 x 7.45
												Dimensions (mm)
												168 x 95.2 x 55
												Dimensions (inches)
												6.61 x 3.75 x 2.17

>> 300W CHARGERS

Smart 300W



PRO 300W




PF2410



Neutec 300W



Phoenix 300W



>> 300W CHARGERS


Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	Smart 300W	24	10		Yes	Yes				Yes		164.2 x 135 x 60
												Dimensions (inches)
												6.46 x 5.31 x 2.36
	PRO 300W	24	10	Yes			Yes			Yes		Dimensions (mm)
												187 x 122.5 x 66.3
												Dimensions (inches)
												7.36 x 4.82 x 2.61
	PF2410	24	10	Yes			Yes			Optional	Yes	Dimensions (mm)
												237.4 x 148 x 69.2
												Dimensions (inches)
												9.35 x 5.83 x 2.72
	Neutec 300W	24	10		Yes	Yes				Yes		Dimensions (mm)
												166.4 x 135 x 66
												Dimensions (inches)
												6.55 x 5.31 x 2.60
	Phoenix 300W	24	10	Yes			Yes			Yes		Dimensions (mm)
												187 x 122.5 x 66.3
												Dimensions (inches)
												7.36 x 4.82 x 2.61

>> 360W CHARGERS

Smart 360W




Customized 360W



PFC0360 – 24CH12X



Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	Smart 360W	24	12		Yes	Yes				Yes		230.2 x 108 x 58.7
												Dimensions (inches)
												9.06 x 4.25 x 2.31
	Customized 360W	24	12		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Yes		Dimensions (mm)
												208.2 x 108 x 57.5
												Dimensions (inches)
												8.20 x 4.25 x 2.26
	PFC0360 – 24CH12X	24	12		Yes	Yes					Yes	Dimensions (mm)
												240 x 76.5 x 258
												Dimensions (inches)
												9.45 x 3.01 x 10.16

>> 450W CHARGERS

Alpha 450W



Smart 450W



PRO 450W




Mission 450W



ideal 450W



Glory 450W

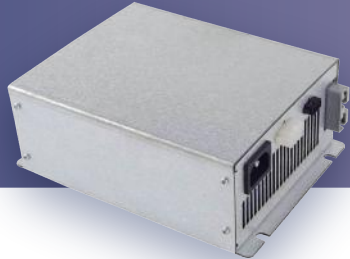

Phoenix 450W



Padova 450W



>> 450W CHARGERS


Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	Alpha 450W	24	15		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Yes		290 x 255 x 177
												Dimensions (inches) 11.42 x 10.04 x 6.97
	Smart 450W	24	15		Yes	Yes				Yes		Dimensions (mm) 184.2 x 135 x 60
												Dimensions (inches) 7.25 x 5.31 x 2.36
	PRO 450W	24	15	Yes				Optional	CANopen, RS485, TTL UART, I²C, etc.	Yes		Dimensions (mm) 218 x 152 x 81
												Dimensions (inches) 8.58 x 5.98 x 3.19
	Mission 450W	24	15	Yes				Optional	CANopen, RS485, TTL UART, I²C, etc.	Yes		Dimensions (mm) 230 x 175 x 80
												Dimensions (inches) 9.06 x 6.89 x 3.15

>> 450W CHARGERS

Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	ideal 450W	24	15		Yes	Yes					Yes	214 x 180 x 140
												Dimensions (inches)
												8.43 x 7.09 x 5.51
	Glory 450W	24	15		Yes	Yes		Optional	CANopen, RS485, TTL UART, I²C, etc.	Yes		Dimensions (mm)
												212.5 x 148 x 74
												Dimensions (inches)
	Phoenix 450W	24	15	Yes			Yes			Yes	Optional	Dimensions (mm)
												187 x 122.5 x 72.4
												Dimensions (inches)
	Padova 450W	24	15		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Yes		Dimensions (mm)
												276.8 x 154.4 x 133.6
												Dimensions (inches)
												10.90 x 6.08 x 5.26

>> 600W CHARGERS


Alpha 600W



Smart 600W



Neutec 600W



Phoenix 600W




>> 600W CHARGERS


Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	Alpha 600W	24	20		Yes	Yes					Optional	350 x 261 x 173
		36	13									Dimensions (inches)
		48	10									13.78 x 10.28 x 6.81
	Smart 600W	24	20		Yes	Yes				Yes	Optional	Dimensions (mm)
		36	13									241.2 x 135 x 60
		48	10									Dimensions (inches)
	Neutec 600W	24	20		Yes	Yes				Yes		210 x 135 x 66.5
		36	13									Dimensions (inches)
		48	10									8.27 x 5.31 x 2.62
	Phoenix 600W	24	20	Yes			Yes			Yes	Optional	Dimensions (mm)
		36	13									253 x 126 x 74
		48	10									Dimensions (inches)
												9.96 x 4.96 x 2.91

>> 720W CHARGERS

iQ 720W




PRO 720W



PRO+ 720W



Mission 720W



>> 720W CHARGERS

Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	iQ 720W	24	30	Yes			Yes	Optional	CANopen, RS485, TTL UART, I²C, etc.	Yes		253 x 126 x 74
		36	20									Dimensions (inches)
		48	15									9.96 x 4.96 x 2.91
	PRO 720W	24	30	Yes			Yes			Yes		Dimensions (mm)
		36	20									253 x 126 x 74
		48	15									Dimensions (inches)
	PRO+ 720W	24	30	Yes			Yes		CANopen, RS485, TTL UART, I²C, etc.	Yes	Optional	Dimensions (mm)
		36	20									282 x 182 x 105.4
		48	15									Dimensions (inches)
	Mission 720W	24	30	Yes			Yes	Optional	CANopen, RS485, TTL UART, I²C, etc.	Yes	Optional	Dimensions (mm)
		36	20									250 x 180 x 80
		48	15									Dimensions (inches)
												9.84 x 7.09 x 3.15

>> 750W CHARGERS




Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	EQ 750W	24	30	Yes			Yes	Optional	CANopen, RS485, TTL UART, I²C, etc.	Yes		195 x 180 x 160
		36	20									Dimensions (inches)
		48	15									7.68 x 7.09 x 6.30
	PRO 750W	24	30	Yes			Yes			Yes		Dimensions (mm)
		36	20									196 x 170 x 155.3
		48	15									Dimensions (inches)
												7.72 x 6.69 x 6.11

>> 800W CHARGERS

Smart 800W



Glory 800W

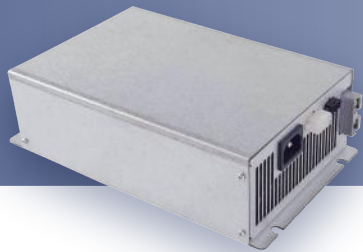

Padova 800W




Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	Smart 360W	24	25		Yes	Yes				Yes	Optional	241.2 x 135 x 60
		36	18									Dimensions (inches)
		48	13									9.50 x 5.31 x 2.36
	Glory 800W	24	25		Yes	Yes		Optional	CANopen, RS485, TTL UART, I²C, etc.	Yes		Dimensions (mm)
		36	18									255 x 152 x 74
		48	13									Dimensions (inches)
	Padova 800W	24	25		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Yes		10.04 x 5.98 x 2.91
		36	18									Dimensions (mm)
		48	13									245 x 162 x 84.4
												Dimensions (inches)
												9.65 x 6.38 x 3.32

>> 900W CHARGERS

Mission 900W



Phoenix 900W



Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	Mission 900W	24	37.5	Yes			Yes	Optional	CANopen, RS485, TTL UART, I²C, etc.	Yes	Optional	335 x 180 x 102
		36	25									Dimensions (inches)
		48	18.8									13.19 x 7.09 x 4.02
	Phoenix 900W	24	30	Yes		Yes			CANopen, RS485, TTL UART, I²C, etc.	Yes	Optional	Dimensions (mm)
		36	20									231.7 x 136.7 x 123.5
		48	15									Dimensions (inches)
												9.12 x 5.38 x 4.86

>> 1000W CHARGERS

PRO 1000W



Neutec 1000W



Neutec ES2435



Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	CAN BUS	On-board	Off-board	Dimensions (mm)
	PRO 1000W	24	30	Yes			Yes		CANopen, RS485, TTL UART, I²C, etc.	Yes	Optional	278 x 246 x 108.6
		36	23									Dimensions (inches)
		48	18									10.94 x 9.69 x 4.28
	Neutec 1000W	24	35		Yes	Yes				Yes		Dimensions (mm)
		36	23									210 x 135 x 66.5
		48	18									Dimensions (inches)
	Neutec ES2435	24	35		Yes	Yes				Yes		8.27 x 5.31 x 2.62
		36	23									Dimensions (mm)
		48	18									251 x 100 x 66.2
												Dimensions (inches)
												9.88 x 3.94 x 2.61

>> 1200W CHARGERS

Alpha 1200W




Smart 1200W



Mission 1200W




L1.2K



ideal 1200W



Glory 1200W



Glory 1200W (L) Padova 1200W



>> 1200W CHARGERS

Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	Alpha 1200W	24	40		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.		Yes	321.2 x 195 x 343.5
		36	27									Dimensions (inches)
		48	20									12.65 x 7.68 x 13.52
	Smart 1200W	24	40		Yes	Yes				Yes	Optional	Dimensions (mm)
		36	27									242 x 134 x 77.1
		48	20									Dimensions (inches)
	Mission 1200W	24	50	Yes		Yes		Optional	CANopen, RS485, TTL UART, I²C, etc.	Yes	Optional	335 x 180 x 104
		36	33									Dimensions (inches)
		48	25									13.19 x 7.09 x 4.09
	L1.2K	24	36	Yes			Yes	Optional	CANopen, RS485, TTL UART, I²C, etc.	Yes	Optional	Dimensions (mm)
		36	30									200 x 180 x 103
		48	25									Dimensions (inches)
												7.87 x 7.09 x 4.06

>> 1200W CHARGERS

Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	ideal 1200W	24	40		Yes	Yes					Yes	274 x 198 x 139.4
		36	27									Dimensions (inches)
		48	20									10.79 x 7.80 x 5.49
	Glory 1200W	24	40		Yes	Yes		Optional	CANopen, RS485, TTL UART, I²C, etc.	Yes		Dimensions (mm)
		36	27									285 x 165 x 74
		48	20									Dimensions (inches)
	Glory 1200W (L)	24	40		Yes	Yes		Optional	CANopen, RS485, TTL UART, I²C, etc.	Yes		306.5 x 175 x 100
		36	27									Dimensions (inches)
		48	20									12.07 x 6.89 x 3.94
	Padova 1200W	24	40		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Yes		Dimensions (mm)
		36	27									310 x 178.3 x 100
		48	20									Dimensions (inches)
												12.20 x 7.02 x 3.94

>> 1800W CHARGERS

Alpha 1800W



Neutec 1800W



Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	Alpha 1800W	24	60		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.		Yes	560 x 562 x 200
		36	40									Dimensions (inches)
		48	30									22.05 x 22.13 x 7.87
	Neutec 1800W	24	60		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Yes	Optional	Dimensions (mm)
		36	40									362 x 185 x 81.5
		48	30									Dimensions (inches)
												14.25 x 7.28 x 3.21

>> 2000W CHARGERS

EQ 2000W



Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	EQ 2000W	24	60	Yes		Yes		Optional	CANopen, RS485, TTL UART, I²C, etc.	Yes		195 x 180 x 190
		36	40									Dimensions (inches)
		48	30									7.68 x 7.09 x 7.48

>> 2400W CHARGERS

Alpha 2400W



UniQ 2400W



Neutec 2400W



Glory 2400W



>> 2400W CHARGERS


Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	Alpha 2400W	24	80		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.		Yes	480 x 400 x 212
		36	53									Dimensions (inches)
		48	40									18.90 x 15.75 x 8.35
	UniQ 2400W	24	80	Yes		Yes				Yes	Optional	Dimensions (mm)
		36	53									392.4 x 270 x 97.5
		48	40									Dimensions (inches)
	Neutec 2400W	24	80		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Yes	Optional	15.45 x 10.63 x 3.84
		36	53									Dimensions (mm)
		48	40									370 x 270 x 95.5
	Glory 2400W	24	80		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Yes	Optional	Dimensions (inches)
		36	53									14.57 x 10.63 x 3.76
		48	40									Dimensions (mm)
		24	80		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Yes	Optional	306 x 297 x 143
		36	53									Dimensions (inches)
		48	40									12.05 x 11.69 x 5.63

>> 3KW CHARGERS

UniQ 3KW




PG3K




L3K



Phoenix 3KW

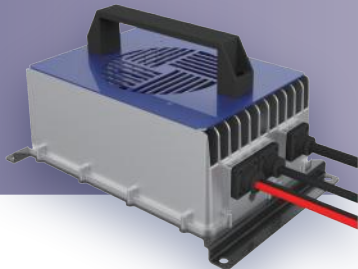

>> 3KW CHARGERS


Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	UniQ 3KW	24	90		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Optional	Yes	380 x 133 x 73
		36	60									Dimensions (inches)
		48	50									14.96 x 5.24 x 2.87
		80	35									
		96										
	PG3K	24	100		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.		Yes	Dimensions (mm)
		36	60									362.4 x 201 x 177.5
		48	50									Dimensions (inches)
		80	35									14.27 x 7.91 x 6.99
		96										
	L3K	24	100	Yes		Yes			CANopen, RS485, TTL UART, I²C, etc.	Yes		Dimensions (mm)
		36	55									246.1 x 178.1 x 105
		48	35									Dimensions (inches)
		80										9.69 x 7.01 x 4.13
		96										
	Phoenix 3KW	24	90	Yes		Yes			CANopen, RS485, TTL UART, I²C, etc.	Yes		Dimensions (mm)
		36	60									315 x 200 x 163
		48	50									Dimensions (inches)
		80										12.40 x 7.87 x 6.42
		96										

>> 3.6KW CHARGERS

Alpha 3600W



UinQ 3600W



Glory 3600W



DSP 3600W



>> 3.6KW CHARGERS

Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	Alpha 3600W	24	120		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.		Yes	600 x 400 x 400
		36	80									Dimensions (inches)
		48	60									23.62 x 15.75 x 15.75
		80										
		96										
	UinQ 3600W	24	120		Yes	Yes				Optional	Yes	Dimensions (mm)
		36	80									404 x 270 x 97.5
		48	60									Dimensions (inches)
		80										15.91 x 10.63 x 3.84
		96										
	Glory 3600W	24	120		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Optional	Yes	Dimensions (mm)
		36	80									322 x 307 x 193
		48	60									Dimensions (inches)
		80										12.68 x 12.09 x 7.60
		96										
	DSP 3600W	24	120	Yes		Yes		Optional	CANopen, RS485, TTL UART, I²C, etc.	Yes	Optional	Dimensions (mm)
		36	80									382.4 x 305.9 x 124
		48	75									Dimensions (inches)
		80	90									15.06 x 12.04 x 4.88
		96	38									

>> 6KW CHARGERS

UinQ 6KW



PG6K



Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	UinQ 6KW	24			Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Optional	Yes	460 x 280 x 85
		36										Dimensions (inches)
		48	100									18.11 x 11.02 x 3.35
		80	65									
		96	55									
	PG6K	24	200		Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.		Yes	Dimensions (mm)
		36	120									397.4 x 241 x 301
		48	100									Dimensions (inches)
		80	70									15.65 x 9.49 x 11.85
		96										

>> 7.2KW CHARGERS

DSP 7200W



Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	DSP 7200W	24		Yes		Yes		Optional	CANopen, RS485, TTL UART, I²C, etc.	Yes	Optional	413 x 366.4 x 135
		36										Dimensions (inches)
		48	150									16.26 x 14.43 x 5.31
		80	90									
		96	75									

>> 8KW CHARGERS

UniQ 8KW



Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	UniQ 8KW	24			Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Optional	Yes	505 x 300 x 81
		36										Dimensions (inches)
		48	160									19.88 x 11.81 x 3.19
		80	100									
		96	83									

>> 10KW CHARGERS


UinQ 10KW




PG10K




L10K (F)



L10K (N)





>> 10KW CHARGERS

Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	UinQ 10KW	24			Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Optional	Yes	505 x 300 x 81
		36										Dimensions (inches)
		48	170									19.88 x 11.81 x 3.19
		80	130									
		96	108									
	PG10K	24		Yes		Yes			CANopen, RS485, TTL UART, I²C, etc.		Yes	Dimensions (mm)
		36	150									521.3 x 249 x 373.3
		48	150									Dimensions (inches)
		80	100									20.52 x 9.80 x 14.70
		96	80									
		150	60									
		200	45									
		310	30									
		350	25									
	L10K (F)	24		Yes		Yes			CANopen, RS485, TTL UART, I²C, etc.	Yes		Dimensions (mm)
		36	150									302.8 x 298 x 134.3
		48	150									Dimensions (inches)
		80	100									11.92 x 11.73 x 5.29
		96	80									
		150	60									
		200	45									
		310	30									
		350	25									
	L10K (N)	24		Yes		Yes			CANopen, RS485, TTL UART, I²C, etc.	Yes		Dimensions (mm)
		36	150									362 x 302.2 x 81.7
		48	150									Dimensions (inches)
		80	100									14.25 x 11.90 x 3.22
		96	80									
		150	60									
		200	45									
		310	30									
		350	25									

>> 12KW CHARGERS

UniQ 12KW

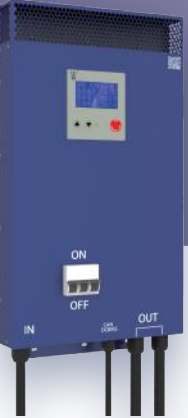

Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	UniQ 12KW	24			Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Optiona	Yes	505 x 300 x 81
		36										Dimensions (inches)
		48	200									19.88 x 11.81 x 3.19
		80	150									
		96	125									

>> 16KW CHARGERS

UniQ 16KW



Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	UniQ 16KW	24			Yes	Yes			CANopen, RS485, TTL UART, I²C, etc.	Optional	Yes	575 x 345 x 85
		36										Dimensions (inches)
		48	200									22.64 x 13.58 x 3.35
		80	200									
		96	160									

>> 20KW CHARGERS

PG20K



Product Image	Model	Volt	Amp	Sealed	Non-sealed	Fan	No Fan	Data log	COMM	On-board	Off-board	Dimensions (mm)
	PG20K	24		Yes		Yes			CANopen, RS485, TTL UART, I²C, etc.		Yes	521.3 x 288 x 373.3
		36										Dimensions (inches)
		48	300									20.52 x 11.34 x 14.70
		80	200									
		96										
		150	120									
		200	90									
		310										
		350	60									